

## KS...H68 Wall Trunking

### Overview:

**Application**


Indoor cable routing for power, voice, and data services

**Material**

Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished - white to RAL9010 or grey to RAL 7035

**Available to order:**

L - powder coating in a full range of colours (PC)

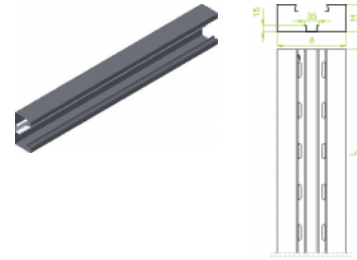

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
<b>KS115H68/2</b>	<b>2000</b>	<b>115</b>	<b>960111</b>	<b>4</b>	<b>68</b>	<b>2,00</b>
<b>KS130H68/2</b>	<b>2000</b>	<b>130</b>	<b>960113</b>	<b>4</b>	<b>68</b>	<b>3,00</b>
<b>KS170H68/2</b>	<b>2000</b>	<b>170</b>	<b>960117</b>	<b>2</b>	<b>68</b>	<b>3,30</b>

### Connected products:



KPKS...H68 90° Elbow



KPKSd215H68 90° Elbow 2 Comp.



KSd215H68 Wall Trunking 2 Comp.



PKS Cover for Wall Trunking



KWKS...H68 Internal Bend



KWKSd215H68 Internal Bend 2 Comp.



KZKS...H68 External Bend



KZKSd215H68 External Bend 2 Comp.



TSKS...H68 Tee



TSKSd215H68 Tee 2 Comp.



ZK...H68 Blind End



LKSH68 Notched Connector