

KZKS...H68 External Bend

Overview:

Application

Indoor cable routing for power, voice, and data services


Material

Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished - white to RAL9010 or grey to RAL 7035

Available to order:

L - powder coating in a full range of colours (PC)

Note: Cover included

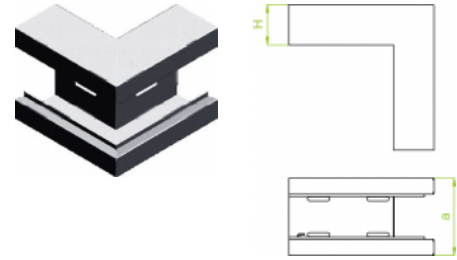

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KZKS115H68	115	960311	8	68	0,65
KZKS130H68	130	960313	8	68	0,70
KZKS170H68	170	960317	6	68	0,80

Connected products:



KPKS...H68 90° Elbow



KPKSd215H68 90° Elbow 2 Comp.



KS...H68 Wall Trunking



KSd215H68 Wall Trunking 2 Comp.



PKS Cover for Wall Trunking



KWKS...H68 Internal Bend



KWKSd215H68 Internal Bend 2 Comp.



KZKSd215H68 External Bend 2 Comp.



TSKS...H68 Tee



TSKSd215H68 Tee 2 Comp.



ZK...H68 Blind End



LKSH68 Notched Connector