

KS...H100 Wall Trunking

Overview:

Application


Indoor cable routing for power, voice, and data services

Material

Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished - white to RAL9010 or grey to RAL 7035

Available to order:

L - powder coating in a full range of colours (PC)

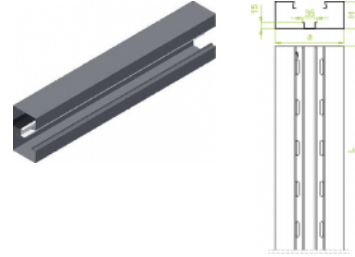

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
KS115H100/2	2000	115	910111	2	100	3,36
KS130H100/2	2000	130	910113	2	100	3,46
KS170H100/2	2000	170	910117	2	100	3,75

Connected products:



KPKS...H100 90° Elbow



KPKSd215H100 90° Elbow 2 Comp.



KSd215H100 Wall Trunking 2 Comp.



KWKS...H100 Internal Bend



KWKSd215H100 Internal Bend 2 Comp.



KZKS...H100 External Bend



KZKSd215H100 External Bend 2 Comp.



TSKS...H100 Tee



TSKSd215H100 Tee 2 Comp.



ZK...H100 Blind End



LKSH100 Notched Connector