

## SPI... Power Post

### Overview:

**Application**

Indoor cable routing for power, voice, and data services


**Material**

Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished – white to RAL9010 or grey to RAL 7035

**Available to order:**

L – powder coating in a full range of colours (PC)

**Height adjustment allows for installation to the ceiling**

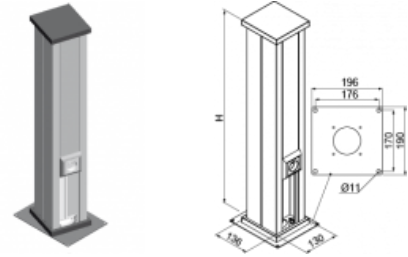

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
<b>SPI 250</b>	<b>911011</b>	<b>6</b>	<b>250</b>	<b>3,15</b>
<b>SPI 500</b>	<b>911013</b>	<b>4</b>	<b>500</b>	<b>5,15</b>
<b>SPI 700</b>	<b>911015</b>	<b>4</b>	<b>700</b>	<b>6,50</b>

### Connected products:

