

## WBC... Channel Hanger

### Overview:

#### Application


Suspending cable routes  
Rod Centre Hanger WBC 40 will suit support channels:  
CWD40H22, CWP40H22, CWC40H22, CWD40H35, CWP40H35, CWC40H35, CWD40H40, CWP40H40, CWC40H40, CWD40H47, CWP40H47, CWC40H47, CMD40H22, CMP40H22, CMC40H22, CMD40H30, CMP40H30, CMC40H30, CMD40H40, CMP40H40, CMC40H40, CMD40H60, CMP40H60, CMC40H60, Rod Centre Hanger WBC 50 will suit support channels:  
CMD50H30, CMP50H30, CMC50H30, CMD50H50, CMP50H50, CMC50H50, Rod Centre Hanger WBC 50

#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E**- stainless steel (SS)  
**L**- powder coating in a full range of colours (PC)

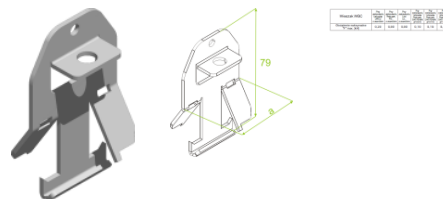

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Catalogue number	Quantity in box	Weight 1 pc.	Size a [mm]
<b>WBC40</b>	<b>730102</b>	<b>100</b>	<b>0,04</b>	<b>47</b>
<b>WBC50</b>	<b>730103</b>	<b>100</b>	<b>0,04</b>	<b>57</b>

### Connected products:



LCM50H50 Channel Connector



FCA Zinc Spray