

LUMPJ...H42 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

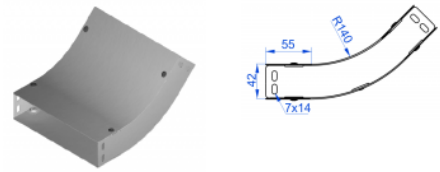


For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling


Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMPJ50H42	50	144114	2	0,41
LUMPJ100H42	100	144214	2	0,62
LUMPJ150H42	150	144314	2	0,87
LUMPJ200H42	200	144414	2	1,69
LUMPJ300H42	300	144514	2	2,03
LUMPJ400H42	400	144614	2	2,35
LUMPJ500H42	500	144714	2	2,68
LUMPJ600H42	600	144814	2	3,07

Connected products:

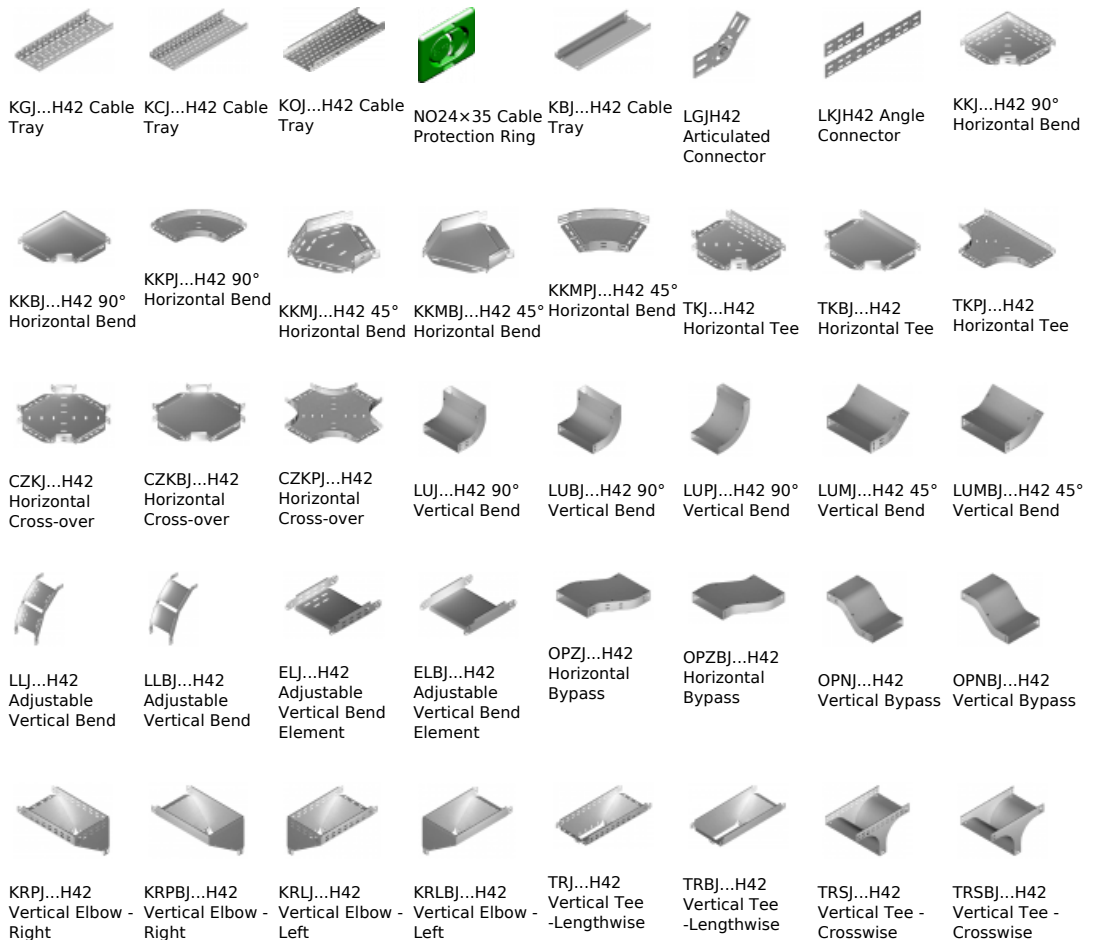

RKLJ...H42 Left
ReducerRKLBJ...H42 Left
ReducerRKPJ...H42 Right
ReducerRKPBJ...H42
Right ReducerRKSJ...H42
Straight
ReducerRKSBJ...H42
Straight
ReducerLRJH42 Corner
ConnectorLRBH42 Corner
ConnectorTKDJ...H42
Add-on TeeLRPJH42 Corner
ConnectorLRPPH42 Corner
Connector