

## WWSS... Bracket

### Overview:

**Application**

Suspending wire mesh cable trays.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

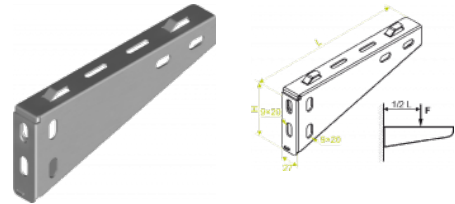

**Important!**

**Bracket WWSS may be used in combination with Clamping**

**Piece ZS/ZSO**

### Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
<b>WWSS 100</b>	<b>115</b>	<b>900710</b>	<b>30</b>	<b>80</b>	<b>0,19</b>	<b>1,20</b>
<b>WWSS 200</b>	<b>215</b>	<b>900720</b>	<b>30</b>	<b>90</b>	<b>0,38</b>	<b>1,40</b>
<b>WWSS 300</b>	<b>315</b>	<b>900730</b>	<b>30</b>	<b>115</b>	<b>0,77</b>	<b>1,90</b>
<b>WWSS 400</b>	<b>415</b>	<b>900740</b>	<b>20</b>	<b>115</b>	<b>1,20</b>	<b>1,80</b>
<b>WWSS 500</b>	<b>515</b>	<b>900750</b>	<b>20</b>	<b>115</b>	<b>1,22</b>	<b>1,60</b>
<b>WWSS 600</b>	<b>615</b>	<b>900760</b>	<b>20</b>	<b>115</b>	<b>1,33</b>	<b>1,50</b>

### Connected products:

