

LDC...H120N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

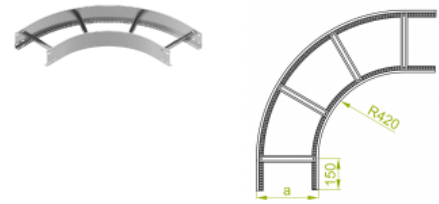

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDC100H120N	100	483710	2	5,72
LDC200H120N	200	483720	2	6,61
LDC300H120N	300	483730	2	7,50
LDC400H120N	400	483740	2	8,39
LDC500H120N	500	483750	2	9,30
LDC600H120N	600	483760	2	10,28