

LDZC...H120N 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

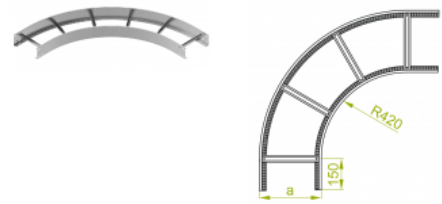

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H120N	100	483910	2	6,56
LDZC200H120N	200	483920	2	8,30
LDZC300H120N	300	483930	2	10,13
LDZC400H120N	400	483940	2	11,87
LDZC500H120N	500	483950	2	13,59
LDZC600H120N	600	483960	2	15,54