

RDLC...H120N Left Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

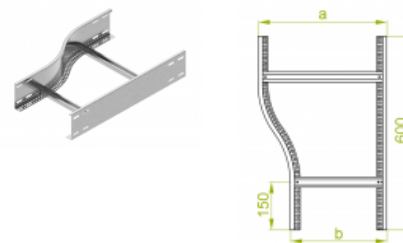

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDLC200/100H120N	200	485310	2	3,22	100
RDLC300/200H120N	300	485320	2	3,45	200
RDLC400/300H120N	400	485330	2	3,69	300
RDLC500/400H120N	500	485340	2	3,93	400
RDLC600/500H120N	600	485350	2	4,14	500