

WWV... Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components under very heavy load

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

IMPORTANT! Non-standard lengths of brackets available to special order

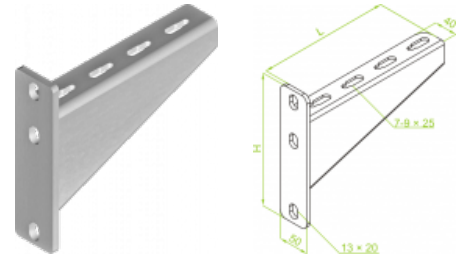

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWV200	215	711920	20	175	1,16	6,50
WWV300	315	711930	10	175	1,49	6,50
WWV400	415	711940	10	195	2,42	6,50
WWV500	515	711950	10	195	2,88	6,50
WWV600	615	711960	4	250	4,17	5,00
WWV700	715	711970	4	250	4,77	5,00
WWV800	815	711980	4	250	5,35	5,00