

LPDZOPN 90° Vertical Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation with cable ladders use 2 pairs of LDOCH60N or LDOCH60E with 16 sets of Screw SGN M8×14 or SGN M8×14 E

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables

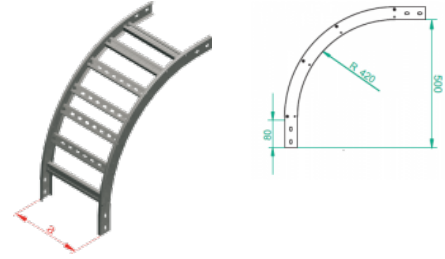

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDZOP100H60N	100	866010	1	1,90
LPDZOP200H60N	200	866020	1	2,26
LPDZOP300H60N	300	866030	1	2,66
LPDZOP400H60N	400	866040	1	3,02
LPDZOP500H60N	500	866050	1	3,42
LPDZOP600H60N	600	866060	1	3,82

Connected products:

