

KKBP...H110 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

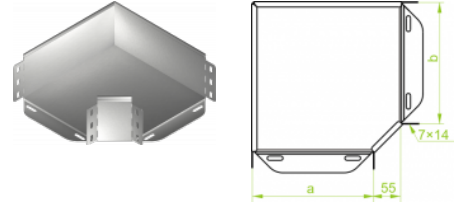

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKBP100H110	100	126210	10	0,86
KKBP150H110	150	126215	10	1,12
KKBP200H110	200	126220	10	1,60
KKBP300H110	300	126230	4	2,67
KKBP400H110	400	126240	4	3,97
KKBP500H110	500	126250	2	4,98
KKBP600H110	600	126260	2	6,70