

KKPJ...H110 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

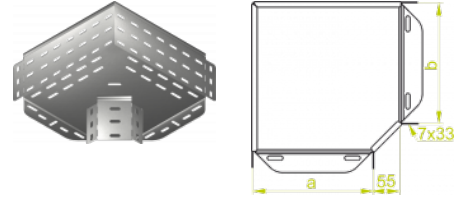

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKPJ100H110	100	120114	10	0,82
KKPJ150H110	150	120214	10	1,06
KKPJ200H110	200	120314	10	1,33
KKPJ300H110	300	120414	4	1,97
KKPJ400H110	400	120514	4	2,66
KKPJ500H110	500	120614	2	3,62
KKPJ600H110	600	120714	2	4,63