


## KKMJ...H50 45° Horizontal Bend

### Overview:

**Application**  
Diversions in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

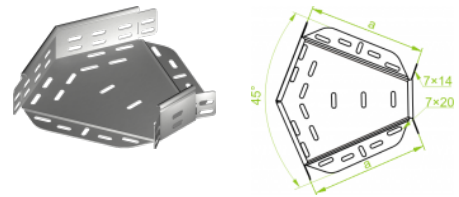


For installation use Screw Sets SGK M6×12 or SG M6×12.

### Versions:

Sheet thickness: 1,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMJ50H50	50	156405	20	0,15
KKMJ100H50	100	156410	20	0,23
KKMJ150H50	150	156415	10	0,39
KKMJ200H50	200	156420	10	0,54
KKMJ300H50	300	156430	10	0,90
KKMJ400H50	400	156440	10	1,50
KKMJ500H50	500	156450	10	2,00
KKMJ600H50	600	156460	10	2,59

### Connected products:

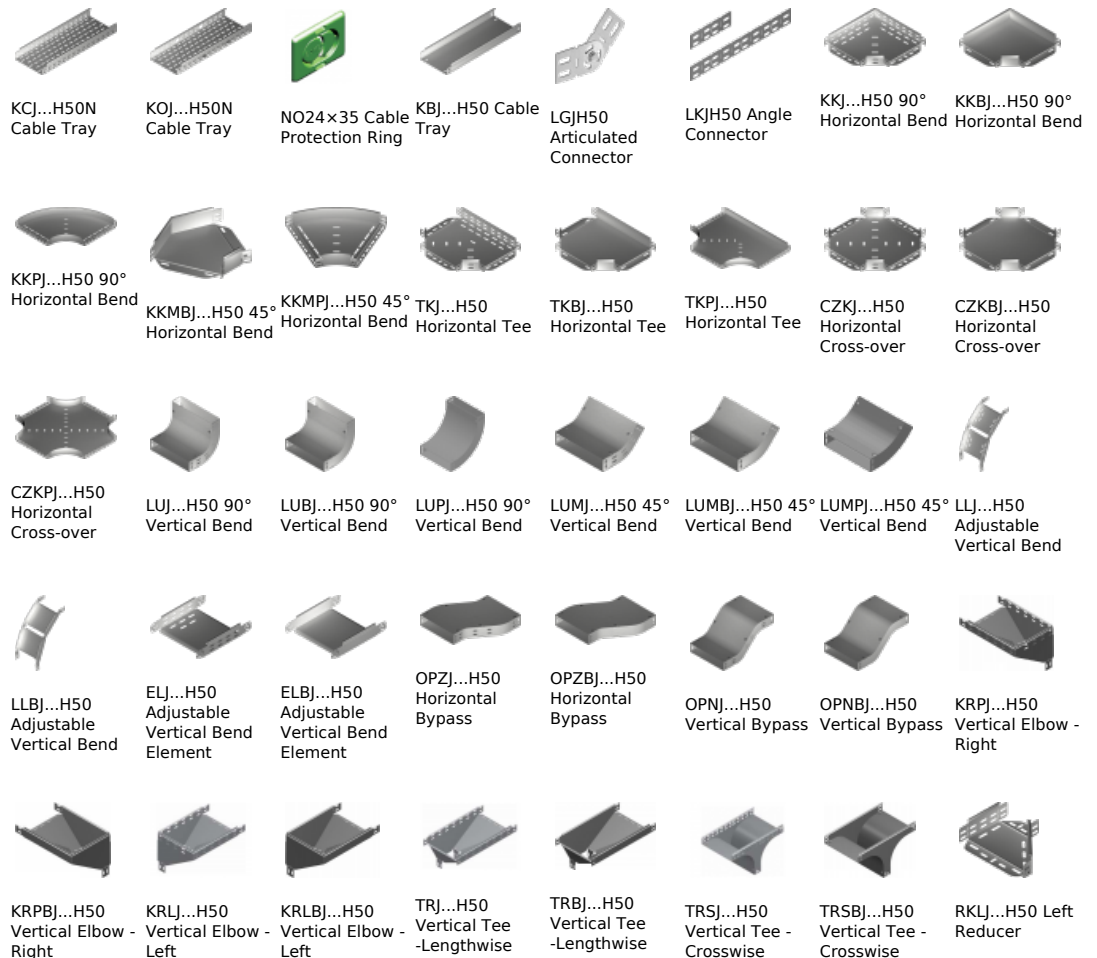

RKLBJ...H50  
ReducerRKPJ...H50  
ReducerRKPBJ...H50  
Right ReducerRKSJ...H50  
Straight  
ReducerRKSBJ...H50  
Straight  
ReducerLRJH50 Corner  
ConnectorLRBIH50 Corner  
ConnectorTKDJ...H50  
Add-on TeeLRPJH50 Corner  
Connector