


KKMJ...H50 45° Horizontal Bend

Overview:

Application
Diversions in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

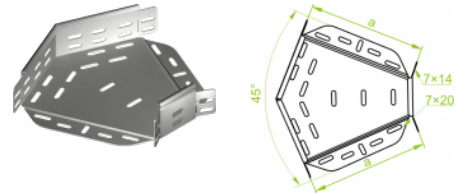


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMJ50H50	50	156405	20	0,15
KKMJ100H50	100	156410	20	0,23
KKMJ150H50	150	156415	10	0,39
KKMJ200H50	200	156420	10	0,54
KKMJ300H50	300	156430	10	0,90
KKMJ400H50	400	156440	10	1,50
KKMJ500H50	500	156450	10	2,00
KKMJ600H50	600	156460	10	2,59

Connected products:

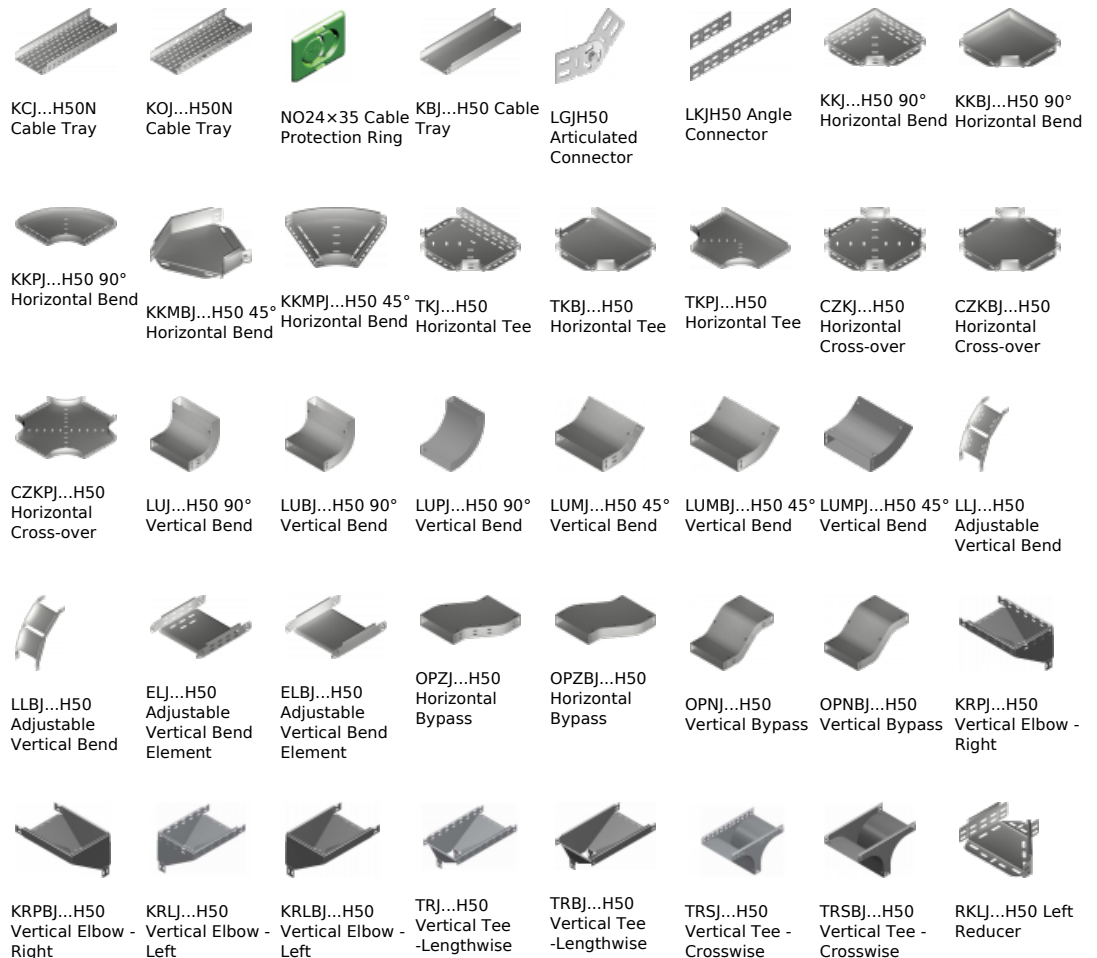

RKLBJ...H50
ReducerRKPJ...H50
ReducerRKPBJ...H50
Right ReducerRKSJ...H50
Straight
ReducerRKSBJ...H50
Straight
ReducerLRJH50 Corner
ConnectorLRBIH50 Corner
ConnectorTKDJ...H50
Add-on TeeLRPJH50 Corner
Connector