

TKJ...H110 Horizontal Tee

Overview:

Application

Branching out cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

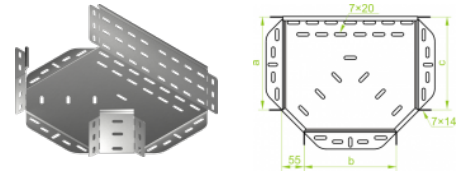

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions: a, b, etc.

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|------------|--------------|------------------|-----------------|--------------|
| TKJ100H110 | 100 | 122510 | 10 | 0,67 |
| TKJ150H110 | 150 | 122515 | 10 | 0,77 |
| TKJ200H110 | 200 | 122520 | 10 | 1,09 |
| TKJ300H110 | 300 | 122530 | 4 | 1,67 |
| TKJ400H110 | 400 | 122540 | 4 | 2,75 |
| TKJ500H110 | 500 | 122550 | 2 | 3,46 |
| TKJ600H110 | 600 | 122560 | 2 | 4,75 |