


KKMBJ...H50 45° Horizontal Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

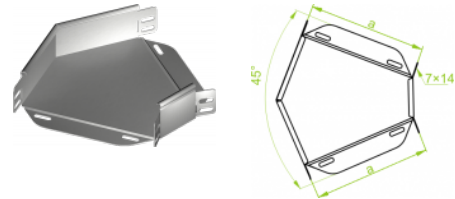


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: 1,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ50H50	50	150103	20	0,15
KKMBJ100H50	100	150203	20	0,23
KKMBJ150H50	150	150303	10	0,39
KKMBJ200H50	200	150403	10	0,54
KKMBJ300H50	300	150603	10	0,90
KKMBJ400H50	400	150703	10	1,50
KKMBJ500H50	500	150803	10	2,00
KKMBJ600H50	600	150903	10	2,59

Connected products:

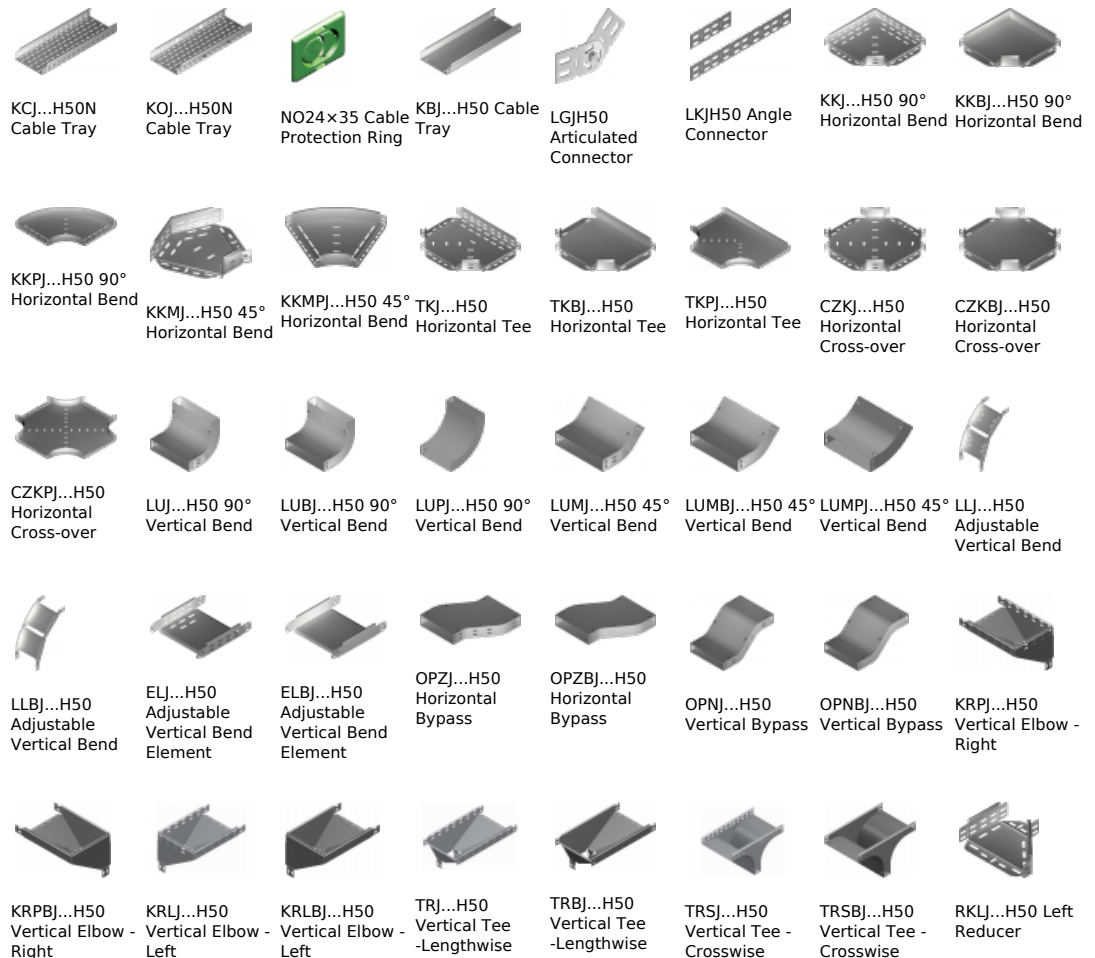

RKLBJ...H50
ReducerRKPJ...H50
ReducerRKPBJ...H50
Right ReducerRKSJ...H50
Straight
ReducerRKSBJ...H50
Straight
ReducerLRJH50 Corner
ConnectorLRBIH50 Corner
ConnectorTKDJ...H50
Add-on TeeLRPJH50 Corner
Connector