

## LUP...H110 90° Vertical Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

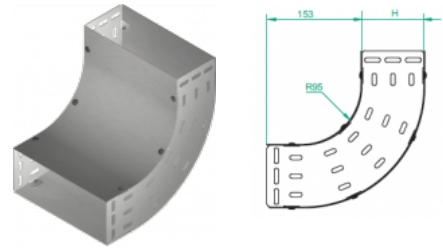

**For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUP100H110	100	123010	10	2,43
LUP150H110	150	123015	10	2,94
LUP200H110	200	123020	4	3,48
LUP300H110	300	123030	4	4,51
LUP400H110	400	123040	2	5,56
LUP500H110	500	123050	2	6,57
LUP600H110	600	123060	2	7,62