

LUPJ...H110 90° Vertical Bend

Overview:

Application

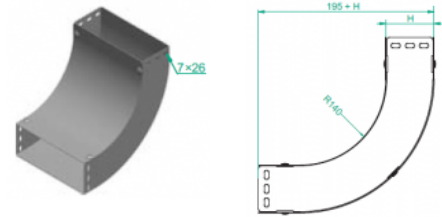
Diversions in cable routing.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

 Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUPJ100H110	100	125714	2	1,78
LUPJ150H110	150	125814	2	2,17
LUPJ200H110	200	125914	2	2,55
LUPJ300H110	300	126014	2	3,31
LUPJ400H110	400	126114	2	4,08
LUPJ500H110	500	126214	2	4,83
LUPJ600H110	600	126314	2	5,63