

LUMJ...H110 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

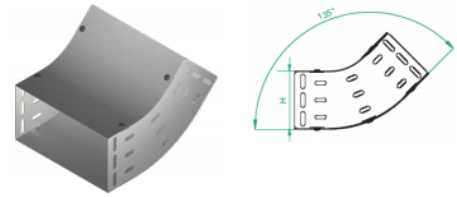

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMJ100H110	100	123110	2	1,13
LUMJ150H110	150	123115	2	1,37
LUMJ200H110	200	123120	2	1,62
LUMJ300H110	300	123130	2	2,10
LUMJ400H110	400	123140	2	2,59
LUMJ500H110	500	123150	2	3,07
LUMJ600H110	600	123160	2	3,55