

## LUMPJ...H110 90° Vertical Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

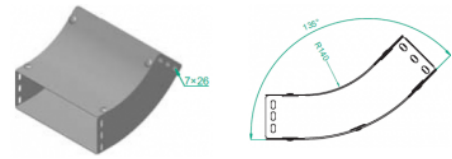

**For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMPJ100H110	100	127114	2	1,24
LUMPJ150H110	150	127214	2	1,51
LUMPJ200H110	200	127314	2	1,78
LUMPJ300H110	300	127414	2	2,31
LUMPJ400H110	400	127514	2	2,85
LUMPJ500H110	500	127614	2	3,37
LUMPJ600H110	600	127714	2	3,91