

OPNBP...H110 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

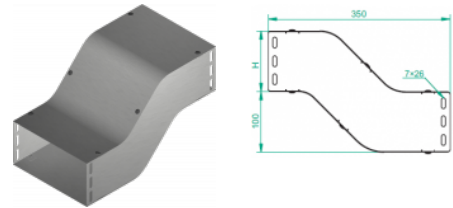

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNBP100H110	100	128010	4	1,70
OPNBP150H110	150	128015	4	2,08
OPNBP200H110	200	128020	4	2,46
OPNBP300H110	300	128030	4	3,40
OPNBP400H110	400	128040	2	4,04
OPNBP500H110	500	128050	2	5,15
OPNBP600H110	600	128060	2	5,68