

KRLBJ...H110 Vertical Elbow - Left

Overview:

Application

Transition of tray cable run in the horizontal plane to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

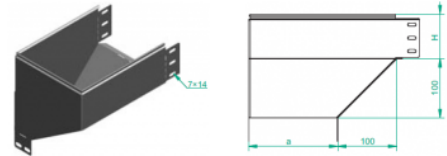

For installation use Screw Sets SGK M6×12 or SG M6×12.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KRLBJ100H110	100	128110	4	1,08
KRLBJ150H110	150	128115	4	1,64
KRLBJ200H110	200	128120	4	2,17
KRLBJ300H110	300	128130	2	3,56
KRLBJ400H110	400	128140	2	4,65
KRLBJ500H110	500	128150	2	5,95
KRLBJ600H110	600	128160	2	7,15