

RKSBJ...H110 Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

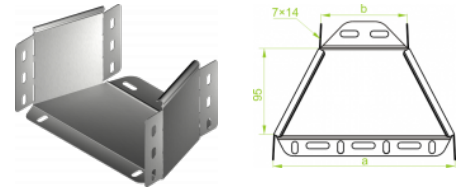

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. | Size b [mm] |
|-------------------------|--------------|------------------|-----------------|--------------|-------------|
| RKSBJ150/100H110 | 150 | 129315 | 10 | 0,30 | 100 |
| RKSBJ200/100H110 | 200 | 129720 | 10 | 0,37 | 100 |
| RKSBJ200/150H110 | 200 | 129820 | 10 | 0,39 | 150 |
| RKSBJ300/200H110 | 300 | 129730 | 10 | 0,41 | 200 |
| RKSBJ400/300H110 | 400 | 129340 | 6 | 0,49 | 300 |
| RKSBJ500/400H110 | 500 | 129350 | 6 | 0,57 | 400 |
| RKSBJ600/500H110 | 600 | 129360 | 6 | 0,65 | 500 |