

ELZP...H50 Adjustable Vertical Bend Element

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend element use Screw Sets SM M8x16

Capability of creating adjustable vertical bends of any internal radius using articulated connectors.

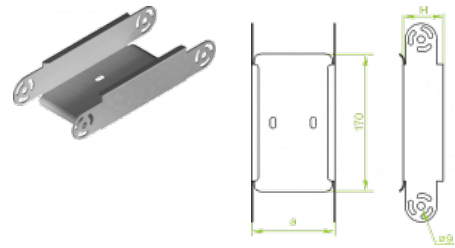

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELZP50H50	50	353205	10	0,36
ELZP100H50	100	353210	10	0,46
ELZP200H50	200	353220	10	0,67
ELZP300H50	300	353230	4	0,87
ELZP400H50	400	353240	4	1,07
ELZP500H50	500	353250	4	1,27
ELZP600H50	600	353260	4	1,48