

## OPNZC...H50 Vertical Bypass

### Overview:

**APPLICATION**

Bypassing obstacles in the vertical plane.

**Material**


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**For joining fittings to cable tray lengths use Straight Connectors LZC...**

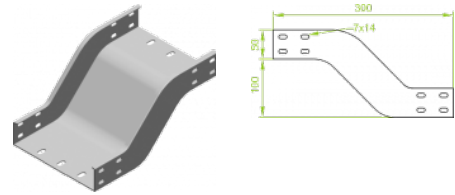

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNZC50H50	50	353705	10	0,84
OPNZC100H50	100	353710	10	1,12
OPNZC200H50	200	353720	10	1,67
OPNZC300H50	300	353730	4	2,23
OPNZC400H50	400	353740	4	2,79
OPNZC500H50	500	353750	4	3,34
OPNZC600H50	600	353760	4	3,90