

LZLC...H100 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend use sets of Screw SGF M8x14

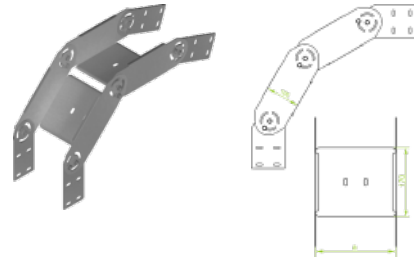

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LZLC100H100 | 100 | 313110 | 10 | 4,56 |
| LZLC200H100 | 200 | 313120 | 10 | 5,11 |
| LZLC300H100 | 300 | 313130 | 4 | 5,64 |
| LZLC400H100 | 400 | 313140 | 4 | 6,17 |
| LZLC500H100 | 500 | 313150 | 4 | 6,72 |
| LZLC600H100 | 600 | 313160 | 4 | 7,26 |