

ELZP...H100 Adjustable Vertical Bend Element

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend element use Screw Sets SM M8x16

Capability of creating adjustable vertical bends of any internal radius using articulated connectors.

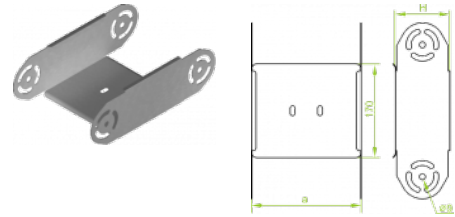

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELZP100H100	100	313210	10	0,75
ELZP200H100	200	313220	10	0,95
ELZP300H100	300	313230	4	1,15
ELZP400H100	400	313240	4	1,35
ELZP500H100	500	313250	4	1,56
ELZP600H100	600	313260	4	1,76