

## ELZC...H100 Adjustable Vertical Bend Element

### Overview:

**APPLICATION**

Diversion in cable routing. Full-range angle adjustment with a lock.

**Material**

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend element use Screw Sets SM M8x16**

**Capability of creating adjustable vertical bends of any internal radius using articulated connectors.**

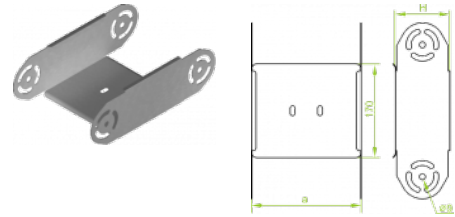

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELZC100H100	100	313310	10	0,99
ELZC200H100	200	313320	10	1,26
ELZC300H100	300	313330	4	1,53
ELZC400H100	400	313340	4	1,80
ELZC500H100	500	313350	4	2,07
ELZC600H100	600	313360	4	2,34