

LUBJ...H50 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

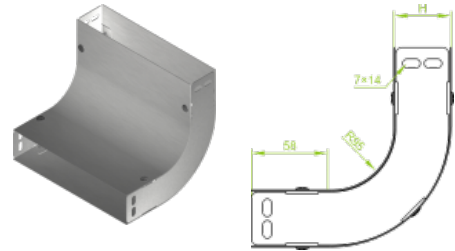

For installation use Screw Sets SGK M6x12 or SG M6x12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUBJ50H50	50	151901	2	0,58
LUBJ100H50	100	152001	2	0,84
LUBJ150H50	150	152101	2	1,12
LUBJ200H50	200	152201	2	1,40
LUBJ300H50	300	152401	2	1,96
LUBJ400H50	400	152501	2	2,52
LUBJ500H50	500	152601	2	3,06
LUBJ600H50	600	152701	2	3,62

Connected products:

