

## LZLP...H200 Adjustable Vertical Bend

### Overview:

**APPLICATION**

Diversion in cable routing. Full-range angle adjustment with a lock.

**Material**


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend use sets of Screw SGF M8x14**

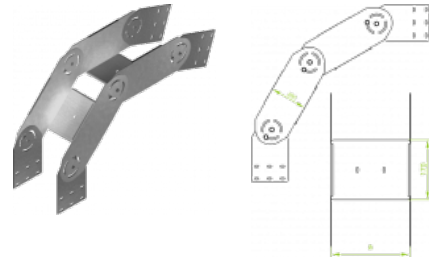

### Versions:

Sheet thickness: **1,5 mm**

| Symbol      | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LZLP200H200 | 200          | 373020           | 10              | 7,53         |
| LZLP300H200 | 300          | 373030           | 4               | 8,07         |
| LZLP400H200 | 400          | 373040           | 4               | 8,60         |
| LZLP500H200 | 500          | 373050           | 4               | 9,13         |
| LZLP600H200 | 600          | 373060           | 4               | 9,67         |