

LZLC...H200 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend use sets of Screw SGF M8x14

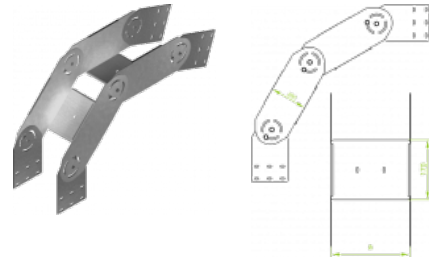

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLC200H200	200	373120	10	8,93
LZLC300H200	300	373130	4	9,65
LZLC400H200	400	373140	4	10,36
LZLC500H200	500	373150	4	11,06
LZLC600H200	600	373160	4	11,78