

## ELZC...H200 Adjustable Vertical Bend Element

### Overview:

**APPLICATION**

Diversion in cable routing. Full-range angle adjustment with a lock.

**Material**

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend element use Screw Sets SM M8x16**

**Capability of creating adjustable vertical bends of any internal radius using articulated connectors.**

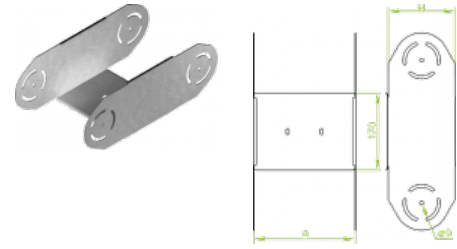

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELZC200H200	200	373320	10	2,83
ELZC300H200	300	373330	4	3,19
ELZC400H200	400	373340	4	3,54
ELZC500H200	500	373350	4	3,89
ELZC600H200	600	373360	4	4,25