

WWCT/WWCTO... Bracket

Overview:

APPLICATION

Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

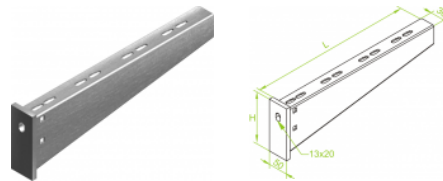

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWCT/WWCTO 200	210	713020	10	90	0,70	5,50
WWCT/WWCTO 300	310	713030	8	110	0,95	5,50
WWCT/WWCTO 400	410	713040	6	130	1,49	5,00
WWCT500	510	713050	1	145	1,70	5,00
WWCT600	610	713060	1	165	2,38	4,50
WWCT700	710	713070	1	185	2,60	4,50
WWCT800	810	713080	1	195	3,38	4,00
WWCT900	910	713090	1	205	3,71	4,00
WWCT1000	1010	713000	1	225	4,45	4,00