

LLJ...H50 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

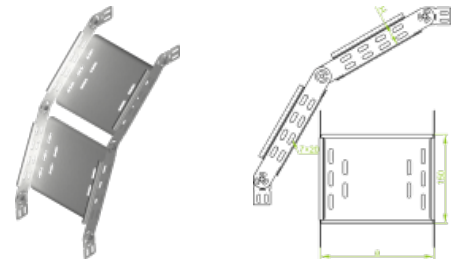

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLJ50H50	50	157405	2	0,98
LLJ100H50	100	157410	2	1,16
LLJ150H50	150	157415	2	1,32
LLJ200H50	200	157420	2	1,50
LLJ300H50	300	157430	2	1,82
LLJ400H50	400	157440	2	2,16
LLJ500H50	500	157450	2	2,48
LLJ600H50	600	157460	2	2,82

Connected products:

