

LLBJ...H50 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

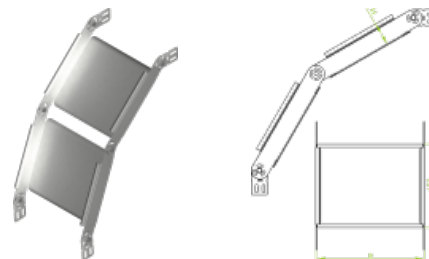

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBJ50H50	50	152801	2	0,98
LLBJ100H50	100	152901	2	1,16
LLBJ150H50	150	153001	2	1,32
LLBJ200H50	200	153101	2	1,50
LLBJ300H50	300	153301	2	1,82
LLBJ400H50	400	153401	2	2,16
LLBJ500H50	500	153501	2	2,48
LLBJ600H50	600	153601	2	2,82

Connected products:

