

LLBP...H50 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

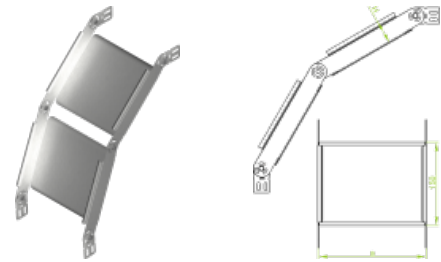

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors


6 sets of screws

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBP50H50	50	152802	10	1,38
LLBP100H50	100	152902	10	1,63
LLBP150H50	150	153002	10	1,87
LLBP200H50	200	153102	10	2,12
LLBP300H50	300	153302	4	2,62
LLBP400H50	400	153402	4	3,12
LLBP500H50	500	153502	4	3,62
LLBP600H50	600	153602	4	4,12

Connected products:

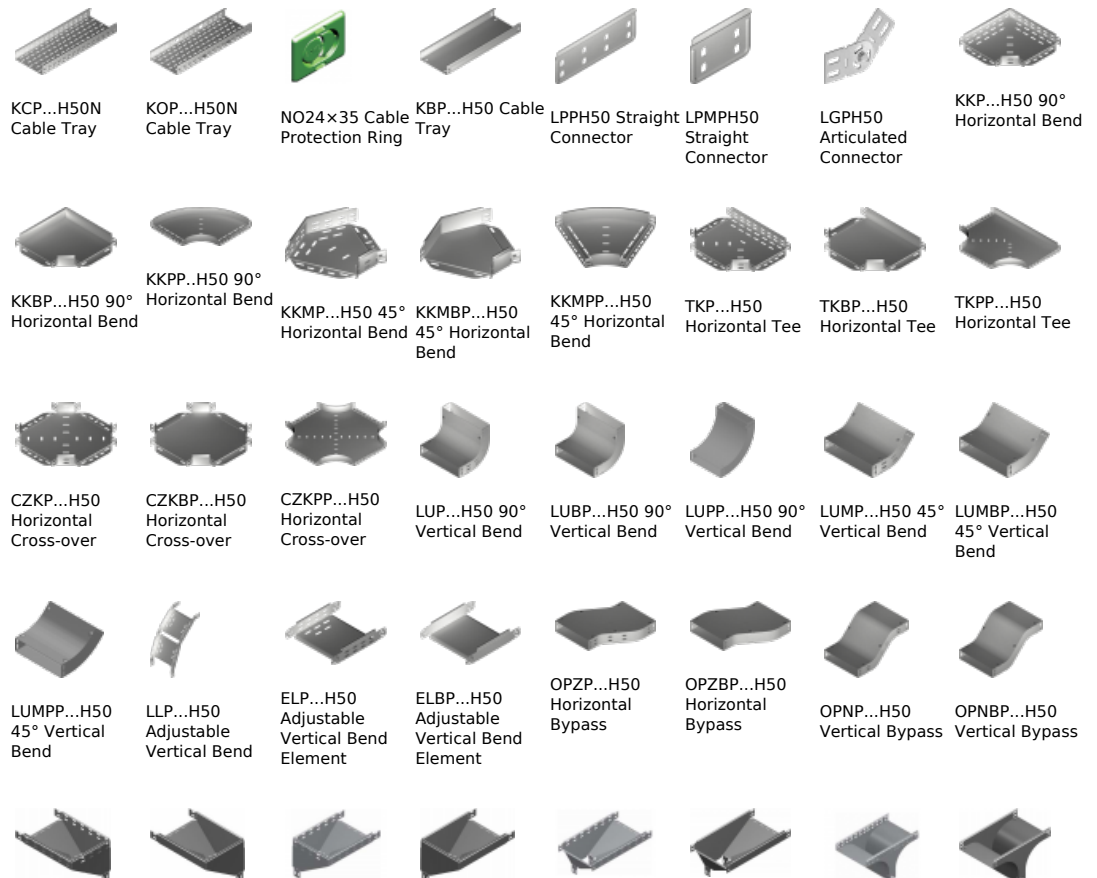

KRPP...H50 Vertical Elbow - Right	KRPBP...H50 Vertical Elbow - Right	KRLP...H50 Vertical Elbow - Left	KRLBP...H50 Vertical Elbow - Left	TRP...H50 Vertical Tee -Lengthwise	TRBP...H50 Vertical Tee -Lengthwise	TRSP...H50 Vertical Tee - Crosswise	TRSBP...H50 Vertical Tee - Crosswise
							
RKLP...H50 Left Reducer	RKLBP...H50 Left Reducer	RKRP...H50 Right Reducer	RKBP...H50 Right Reducer	RKSP...H50 Straight Reducer	RKSBP...H50 Straight Reducer	TKDP...H50 Add-on Tee	LRPPH50 Corner Connector