

WWKS... Bracket

Overview:

Application

Suspending wire mesh cable trays.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

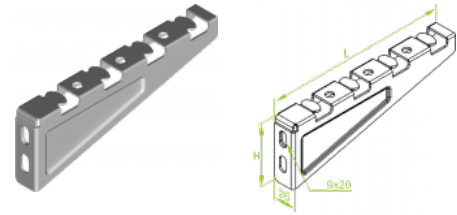

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWKS 100	110	902310	100	70	0,08	0,90
WWKS 150	160	902315	100	70	0,12	1,00
WWKS 200	210	902320	100	75	0,22	1,05
WWKS 300	315	902330	50	95	0,40	1,25
WWKS 400	415	902340	30	95	0,57	1,15
WWKS 500	515	902350	30	95	0,80	1,05
WWKS 600	615	902360	30	95	0,91	0,95