

ELBJ...H50 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

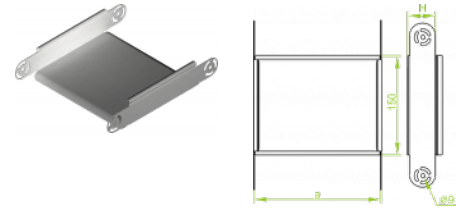

For installation use Screw Sets SGK M6×12 or SG M6×12.

Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELBJ50H50	50	152803	4	0,29
ELBJ100H50	100	152903	4	0,38
ELBJ150H50	150	153003	4	0,46
ELBJ200H50	200	153103	4	0,55
ELBJ300H50	300	153303	4	0,71
ELBJ400H50	400	153403	4	0,88
ELBJ500H50	500	153503	4	1,04
ELBJ600H50	600	153603	4	1,21

Connected products:

