

## KKST...H100N 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

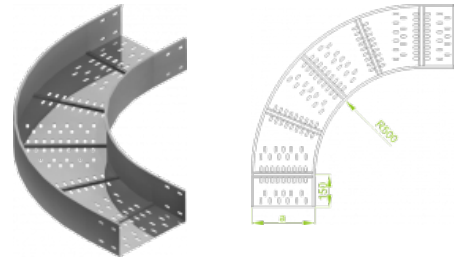

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKST200H100N	200	220723	2	11,58
KKST300H100N	300	220733	2	14,10
KKST400H100N	400	220743	2	16,80
KKST500H100N	500	220753	2	19,68
KKST600H100N	600	220763	2	22,44