

## LWKSM...H100N 90° Vertical Bend - Internal

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)


**L**- powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

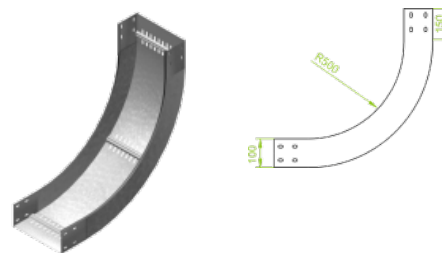

### Versions:

Sheet thickness: 2,5 mm

| Symbol        | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------|--------------|------------------|-----------------|--------------|
| LWKSM200H100N | 200          | 221123           | 2               | 9,84         |
| LWKSM300H100N | 300          | 221133           | 2               | 11,04        |
| LWKSM400H100N | 400          | 221143           | 2               | 12,24        |
| LWKSM500H100N | 500          | 221153           | 2               | 13,50        |
| LWKSM600H100N | 600          | 221163           | 2               | 14,86        |