

## LZKSM...H100N 90° Vertical Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)


**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

Sheet thickness: 2,5 mm

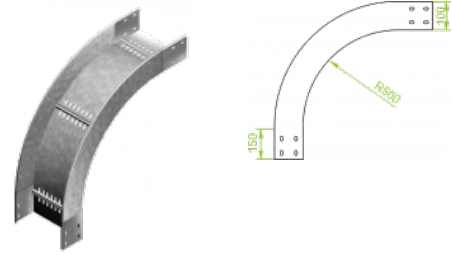

### Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZKSM200H100N	200	221223	2	9,84
LZKSM300H100N	300	221233	2	11,04
LZKSM400H100N	400	221243	2	12,24
LZKSM500H100N	500	221253	2	13,50
LZKSM600H100N	600	221263	2	14,86