

## OPZJ...H50 Horizontal Bypass

### Overview:

**Application**

Bypassing mechanical obstacles in cable routing

**Material**



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)




**For installation use Screw Sets SGK M6x12 or SG M6x12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPZJ50H50	50	154305	2	0,55
OPZJ100H50	100	154310	2	0,81
OPZJ150H50	150	154315	2	1,07
OPZJ200H50	200	154320	2	1,33
OPZJ300H50	300	154330	2	1,87
OPZJ400H50	400	154340	2	2,39
OPZJ500H50	500	154350	2	3,13
OPZJ600H50	600	154360	2	3,47

### Connected products:

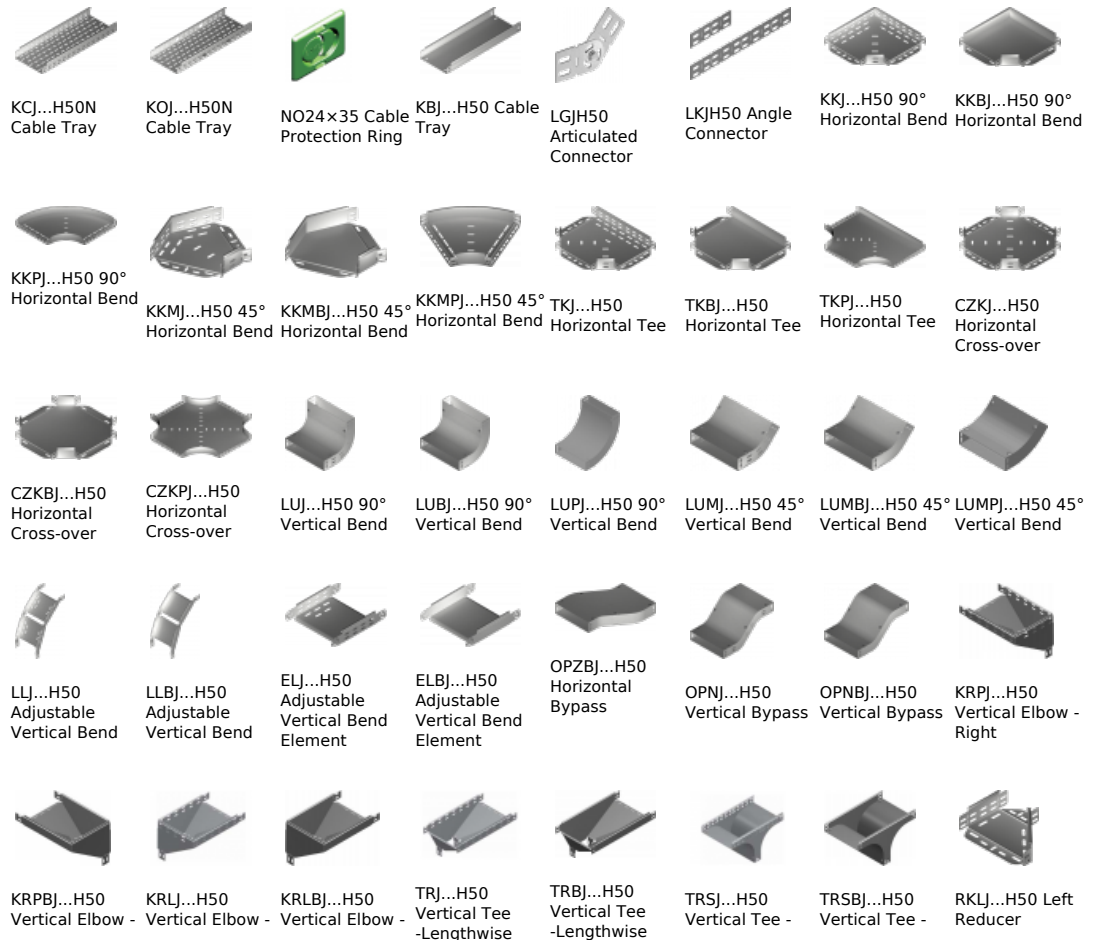

Right

RKLBJ...H50  
Reducer

Left

RKPJ...H50  
Reducer

Left

RKPBJ...H50  
Right ReducerRKSJ...H50  
Straight  
ReducerRKSBJ...H50  
Straight  
Reducer

Crosswise

LRJH50 Corner  
Connector

Crosswise

LRBJH50 Corner  
ConnectorTKDJ...H50  
Add-on TeeLRPJH50 Corner  
Connector