

KKSC...H110 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

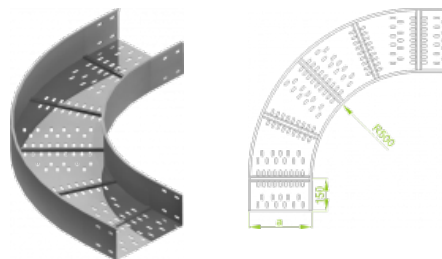

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSC200H110	200	230722	2	8,79
KKSC300H110	300	230732	2	10,89
KKSC400H110	400	230742	2	13,04
KKSC500H110	500	230752	2	15,43
KKSC600H110	600	230762	2	17,58