

KKST...H110 90° Horizontal Bend

Overview:

Application

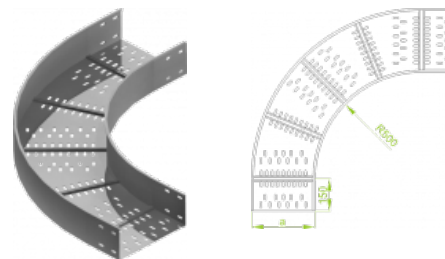
Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


Versions:

 Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKST200H110	200	230723	2	12,12
KKST300H110	300	230733	2	14,74
KKST400H110	400	230743	2	17,50
KKST500H110	500	230753	2	20,44
KKST600H110	600	230763	2	23,20