

KKSMT...H110 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

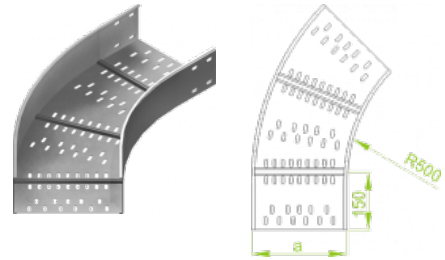

Versions:

Sheet thickness: **3,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------------|--------------|------------------|-----------------|--------------|
| KKSMT200H110 | 200 | 230823 | 2 | 7,54 |
| KKSMT300H110 | 300 | 230833 | 2 | 9,13 |
| KKSMT400H110 | 400 | 230843 | 2 | 10,87 |
| KKSMT500H110 | 500 | 230853 | 2 | 12,71 |
| KKSMT600H110 | 600 | 230863 | 2 | 14,48 |