

## KKSMT...H110 45° Horizontal Bend

### Overview:

#### Application

Diversion in cable routing

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

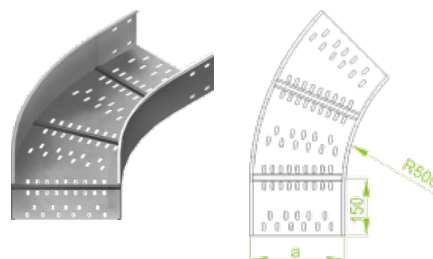

### Versions:

Sheet thickness: **3,0 mm**

| Symbol              | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------------|--------------|------------------|-----------------|--------------|
| <b>KKSMT200H110</b> | <b>200</b>   | <b>230823</b>    | <b>2</b>        | <b>7,54</b>  |
| <b>KKSMT300H110</b> | <b>300</b>   | <b>230833</b>    | <b>2</b>        | <b>9,13</b>  |
| <b>KKSMT400H110</b> | <b>400</b>   | <b>230843</b>    | <b>2</b>        | <b>10,87</b> |
| <b>KKSMT500H110</b> | <b>500</b>   | <b>230853</b>    | <b>2</b>        | <b>12,71</b> |
| <b>KKSMT600H110</b> | <b>600</b>   | <b>230863</b>    | <b>2</b>        | <b>14,48</b> |