

OPZBP...H50 Horizontal Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPZBP50H50	50	153702	10	0,80
OPZBP100H50	100	153802	10	1,22
OPZBP150H50	150	153902	10	1,60
OPZBP200H50	200	154002	10	1,98
OPZBP300H50	300	154202	4	2,92
OPZBP400H50	400	154302	4	3,56
OPZBP500H50	500	154402	4	4,68
OPZBP600H50	600	154502	4	5,24

Connected products:

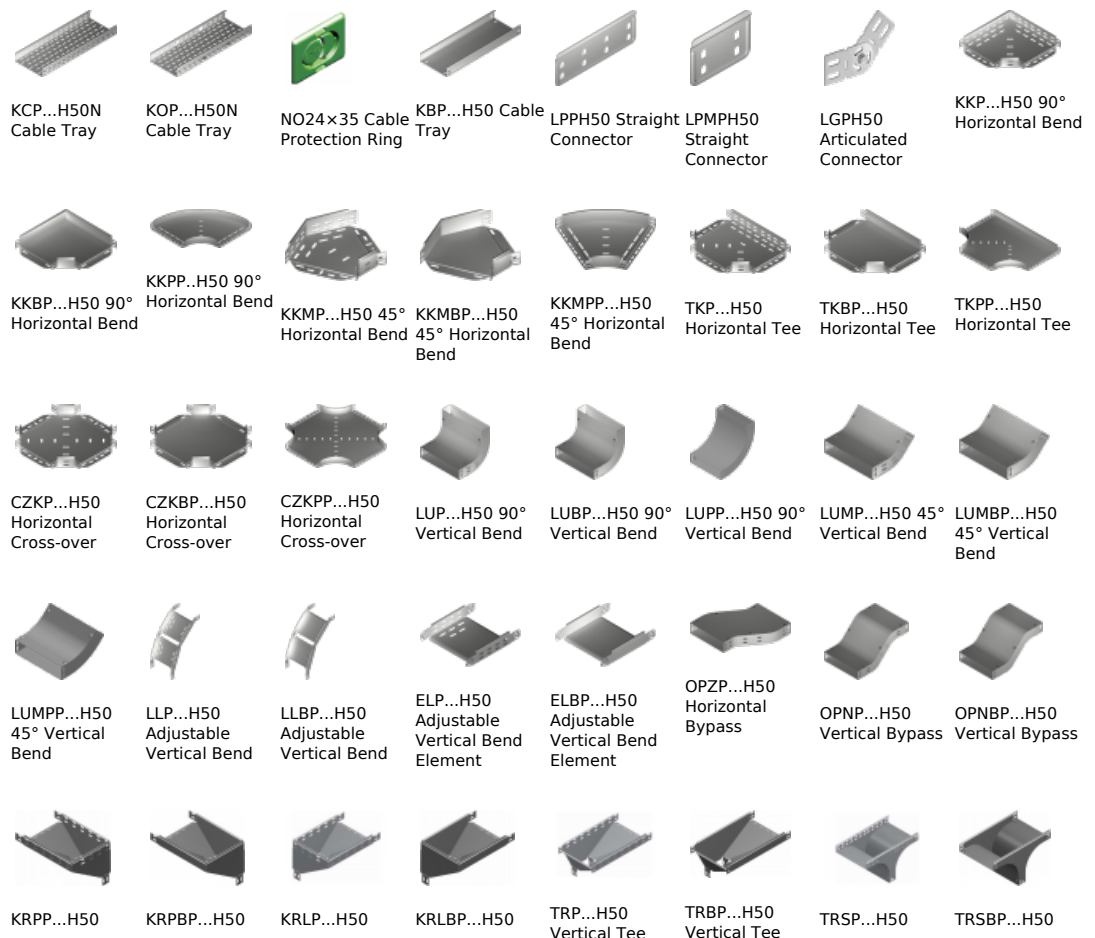

Vertical Elbow - Right	Vertical Elbow - Right	Vertical Elbow - Left	Vertical Elbow - Left	-Lengthwise	-Lengthwise	Vertical Tee - Crosswise	Vertical Tee - Crosswise
							
RKLP...H50 Left Reducer	RKLB...H50 Left Reducer	RKPP...H50 Right Reducer	RKPBP...H50 Right Reducer	RKSP...H50 Straight Reducer	RKSBP...H50 Straight Reducer	TKDP...H50 Add-on Tee	LRPPH50 Corner Connector