

## LWKSC...H110 90° Vertical Bend - Internal

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)


**L-** powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

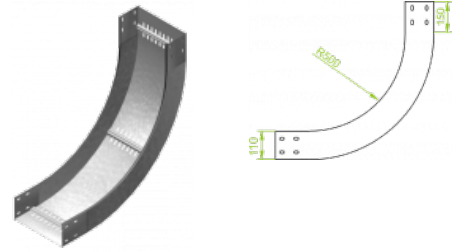

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSC200H110	200	231122	2	7,35
LWKSC300H110	300	231132	2	8,36
LWKSC400H110	400	231142	2	9,18
LWKSC500H110	500	231152	2	10,45
LWKSC600H110	600	231162	2	11,59